

# Air Preparation Products

A range of pneumatic filter/regulators that are recommended for use with all pumps and boosters.


## B01-3202-2GA2



Recommended for use with  
**P720, P801, P901 & M840 Series Units.**

| Ordering Specifications                        | Materials of Construction                       |
|--|---|
| <b>Bowl Capacity:</b> 1 oz.                    | <b>Body:</b> Machined Aluminum                  |
| <b>Maximum Pressure Rating:</b> 250 psi        | <b>Bonnet:</b> Polycarbonate                    |
| <b>Temperature Rating:</b> 0-200° F            | <b>Bowl:</b> Aluminum                           |
| <b>Pressure:</b> 10-130 psi                    | <b>Seat:</b> Nylon                              |
| Accessories & Kits                             | <b>Poppet Spring:</b> Stainless Steel           |
| <b>Element:</b> 23040 - 5 micron               | <b>Whirl Disc:</b> Aluminum                     |
| <b>Regulator Repair Kit:</b> 13532 - Relieving | <b>Element:</b> Polypropylene (5 micron)        |
| <b>Bowl Kit:</b> 23534                         | <b>Element Retainer:</b> Celanese               |
|  | <b>Poppet Valve:</b> Buna-N                     |
|  | <b>Compression Spring:</b> Spring Steel         |
|  | <b>Diaphragm Assembly:</b> Steel, Brass, Buna-N |

## C01-1202-4GA2

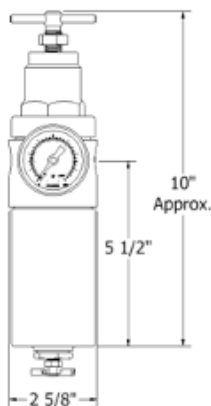

Recommended for use with  
**P820, P825, P826, P830, B822, M845 & M850 Series Units.**

Additional options are available on request.

| Ordering Specifications                        | Materials of Construction                          |
|--|--|
| <b>Bowl Capacity:</b> 8 oz.                    | <b>Body:</b> Machined Aluminum                     |
| <b>Maximum Pressure Rating:</b> 250 psi        | <b>Bonnet:</b> Aluminum                            |
| <b>Temperature Rating:</b> 0-200° F            | <b>Bowl:</b> Aluminum                              |
| <b>Pressure:</b> 10-130 psi                    | <b>Seat:</b> Brass                                 |
| Accessories & Kits                             | <b>Poppet Spring:</b> Stainless Steel              |
| <b>Element:</b> 21037 - 3 micron               | <b>Whirl Disc:</b> Acetal                          |
| <b>Regulator Repair Kit:</b> 11531 - Relieving | <b>Element:</b> Phenolic Acrylic Fibers (3 micron) |
| <b>Bowl Kit:</b> 21558                         | <b>Element Retainer:</b> Zinc Plated Steel         |
|  | <b>Poppet Valve:</b> Buna-N                        |
|  | <b>Compression Spring:</b> Spring Steel            |
|  | <b>Diaphragm Assembly:</b> Steel, Brass, Buna-N    |

**HYDRONIC WARRANTY POLICY:** Hydronic, Corp. warrants each product against defects in material and workmanship for a period of 6 months from the date of manufacturing providing its use was in accordance with Hydronic recommendations. If the product fails to perform as warranted, Hydronic will, at its option, repair or replace the product free of charge. The company will not be liable for incidental or consequential damages. We make no other warranty, expressed or implied, including warranties of merchant ability or fitness for a particular purpose.