


M840 SERIES



M840-16-N

Applications:

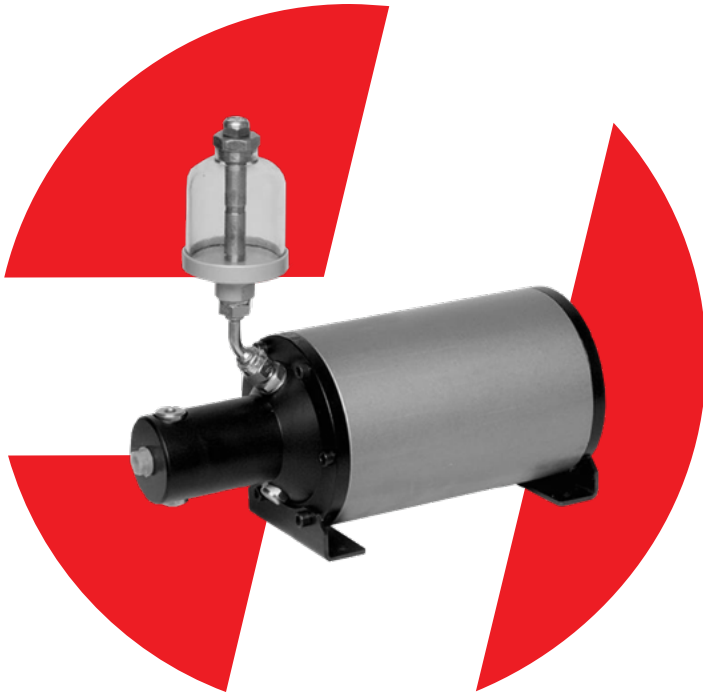

Workholding



**High Pressure
Testing**



Clamping



**Hazardous
Areas**

Description

- Compact, single-acting air-oil booster.
- Air is supplied to the pneumatic circuit by means of a 3-way, 2-position air valve, with pneumatic piston return provided by a strong coil spring.
- Instantaneous force and repeatable precision.
- Transparent oil container for easy visual inspection of the oil level.
- 3,900 PSI maximum hydraulic pressure.

HYDRONIC WARRANTY POLICY: Hydronic, Corp. warrants each product against defects in material and workmanship for a period of 6 months from the date of manufacturing providing its use was in accordance with Hydronic recommendations. If the product fails to perform as warranted, Hydronic will, at its option, repair or replace the product free of charge. The company will not be liable for incidental or consequential damages. We make no other warranty, expressed or implied, including warranties of merchant ability or fitness for a particular purpose.

M840 SERIES

M840



M840 Series M840-8 M840-16 M840-25 M840-39


Air Pressure PSI (Bar)	30-100 PSI (2 - 7)			
Nominal Pressure Ratio	1:8	1:16	1:25	1:39
Max Oil Pressure PSI (Bar)	800 PSI (56)	1,600 PSI (112)	2,500 PSI (175)	3,900 PSI (273)
Oil Volume Cubic Inches (Cubic Centimeters)	6 CU. IN. (105)	3 CU. IN. (49)	2 CU. IN. (34.5)	1 CU. IN. (22)
Standard Booster Weight Lbs (Kg)	11 LBS (5)			

Features:

- Four multiplication ratios that provide hydraulic pressures from 800 to 3,900 PSI.
- Oil volume of up to 6 cubic inches.
- Versions available for corrosive environments.
- Horizontal and vertical mounting capabilities.
- Compact dimensions.
- Three oil outlets.
- Anodized aluminum construction and chromed steel hydraulic piston, which ensures durability and a large number of high-speed cycles.
- Booster provides automatic leakage compensation.
- Clear oil container that provides easy visual inspection of the oil level.

Ordering Information:

M840-16-N




Example Order: M840-16-N = M840 air:oil booster with a 1:16 ratio and Buna seals.

M840 SERIES


Dimensional Data:

M840 Standard

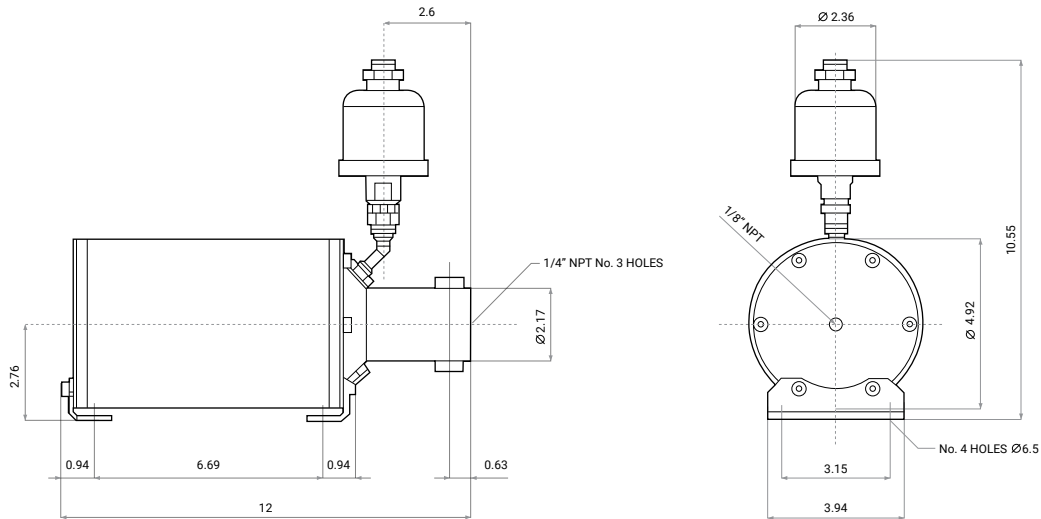

Application Example

- 1: Filter/regulator
- 2: 3-way, 2-position air valve
- 3: Quick discharge valve
- 4: M840 booster
- 5: Cylinder
- 6: Pressure switch
- 7: Oil pressure gauge
- 8: Oil reservoir
- IN: Booster air inlet line
- P: Oil outlet line

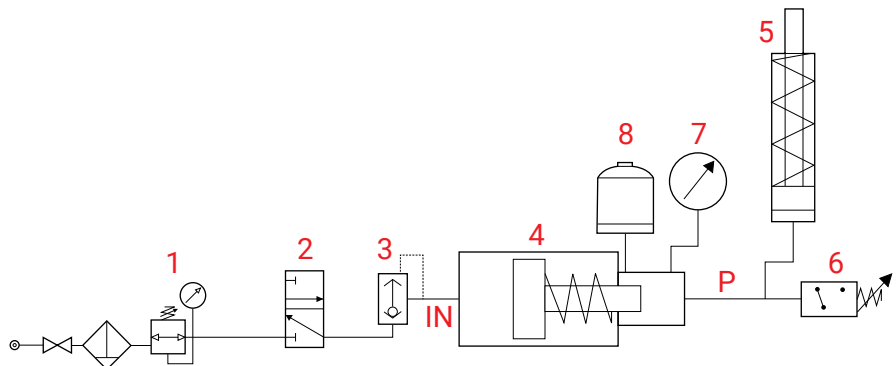

This application allows a line of single-acting cylinders to be operated with very fast cycles, with the pressure switch ensuring that the hydraulic pressure remains within the desired range.