


Hydraulic Gauges



Features:

Dial	2 1/2" (63 mm)
Case	Stainless Steel
Wetted Parts	Copper alloy
Bezel	Stainless Steel, Fixed
Lens	Polycarbonate
Pointer	Black Aluminum
Mount	Lower Mount
Accuracy	2-1-2% of span ASME B40.1 Grade A
Ambient Temp	-30° F to 180° F
Fill Fluid	Fillable = Glycerin, Low Temperature Glycerin, Silicone

Dimensional Data:

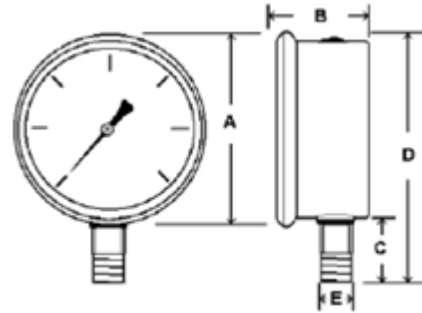

Dial	Unit	A	B	C	D	E
2 1/2"	in.	2.65"	1.2"	.88"	3.3"	1/4 NPT
	mm.	68	30	22	04	

Part Number	Pressure Range
A820-XX-N-GM	0 - 1,000 PSI
A820-XX-N-GN	0 - 1,500 PSI
A820-XX-N-GO	0 - 2,000 PSI
A820-XX-N-GP	0 - 3,000 PSI
A820-XX-N-GR	0 - 5,000 PSI
A820-XX-N-GS	0 - 6,000 PSI
A820-XX-N-GT	0 - 7,500 PSI
A820-XX-N-GU	0 - 10,000 PSI
A820-XX-N-GV	0 - 15,000 PSI

HYDRONIC WARRANTY POLICY: Hydronic, Corp. warrants each product against defects in material and workmanship for a period of 6 months from the date of manufacturing providing its use was in accordance with Hydronic recommendations. If the product fails to perform as warranted, Hydronic will, at its option, repair or replace the product free of charge. The company will not be liable for incidental or consequential damages. We make no other warranty, expressed or implied, including warranties of merchant ability or fitness for a particular purpose.