


Air Preparation Products

A range of pneumatic filter/regulators that are recommended for use with all pumps and boosters.


B01-3202-2GA2

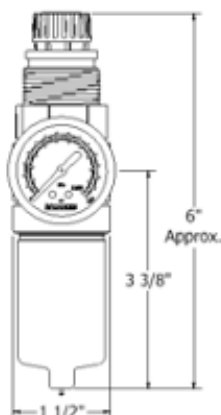

Recommended for use with
P720, P801, P901 & M840 Series Units.

Ordering Specifications	Materials of Construction
Bowl Capacity: 1 oz.	Body: Machined Aluminum
Maximum Pressure Rating: 250 psi	Bonnet: Polycarbonate
Temperature Rating: 0-200° F	Bowl: Aluminum
Pressure: 10-130 psi	Seat: Nylon
Accessories & Kits	Poppet Spring: Stainless Steel
Element: 23040 - 5 micron	Whirl Disc: Aluminum
Regulator Repair Kit: 13532 - Relieving	Element: Polypropylene (5 micron)
Bowl Kit: 23534	Element Retainer: Celanese
	Poppet Valve: Buna-N
	Compression Spring: Spring Steel
	Diaphragm Assembly: Steel, Brass, Buna-N

C01-1202-4GA2

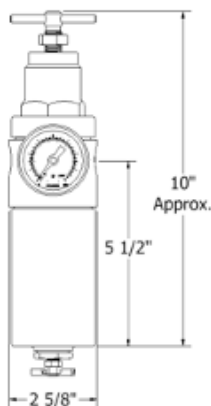

Recommended for use with
P820, P825, P826, P830, B822, M845 & M850 Series Units.

Additional options are available on request.

Ordering Specifications	Materials of Construction
Bowl Capacity: 8 oz.	Body: Machined Aluminum
Maximum Pressure Rating: 250 psi	Bonnet: Aluminum
Temperature Rating: 0-200° F	Bowl: Aluminum
Pressure: 10-130 psi	Seat: Brass
Accessories & Kits	Poppet Spring: Stainless Steel
Element: 21037 - 3 micron	Whirl Disc: Acetal
Regulator Repair Kit: 11531 - Relieving	Element: Phenolic Acrylic Fibers (3 micron)
Bowl Kit: 21558	Element Retainer: Zinc Plated Steel
	Poppet Valve: Buna-N
	Compression Spring: Spring Steel
	Diaphragm Assembly: Steel, Brass, Buna-N

HYDRONIC WARRANTY POLICY: Hydronic, Corp. warrants each product against defects in material and workmanship for a period of 6 months from the date of manufacturing providing its use was in accordance with Hydronic recommendations. If the product fails to perform as warranted, Hydronic will, at its option, repair or replace the product free of charge. The company will not be liable for incidental or consequential damages. We make no other warranty, expressed or implied, including warranties of merchant ability or fitness for a particular purpose.